


| REV | Eng | Date: | Revision Description | ECN# |
|-----|-----|-------|----------------------|------|
| A | | | | |
| B | | | | |
| C | | | | |
| D | | | | |
| E | | | | |
| F | | | | |

INDEX

| SHEET | DESCRIPTION |
|-------|-------------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

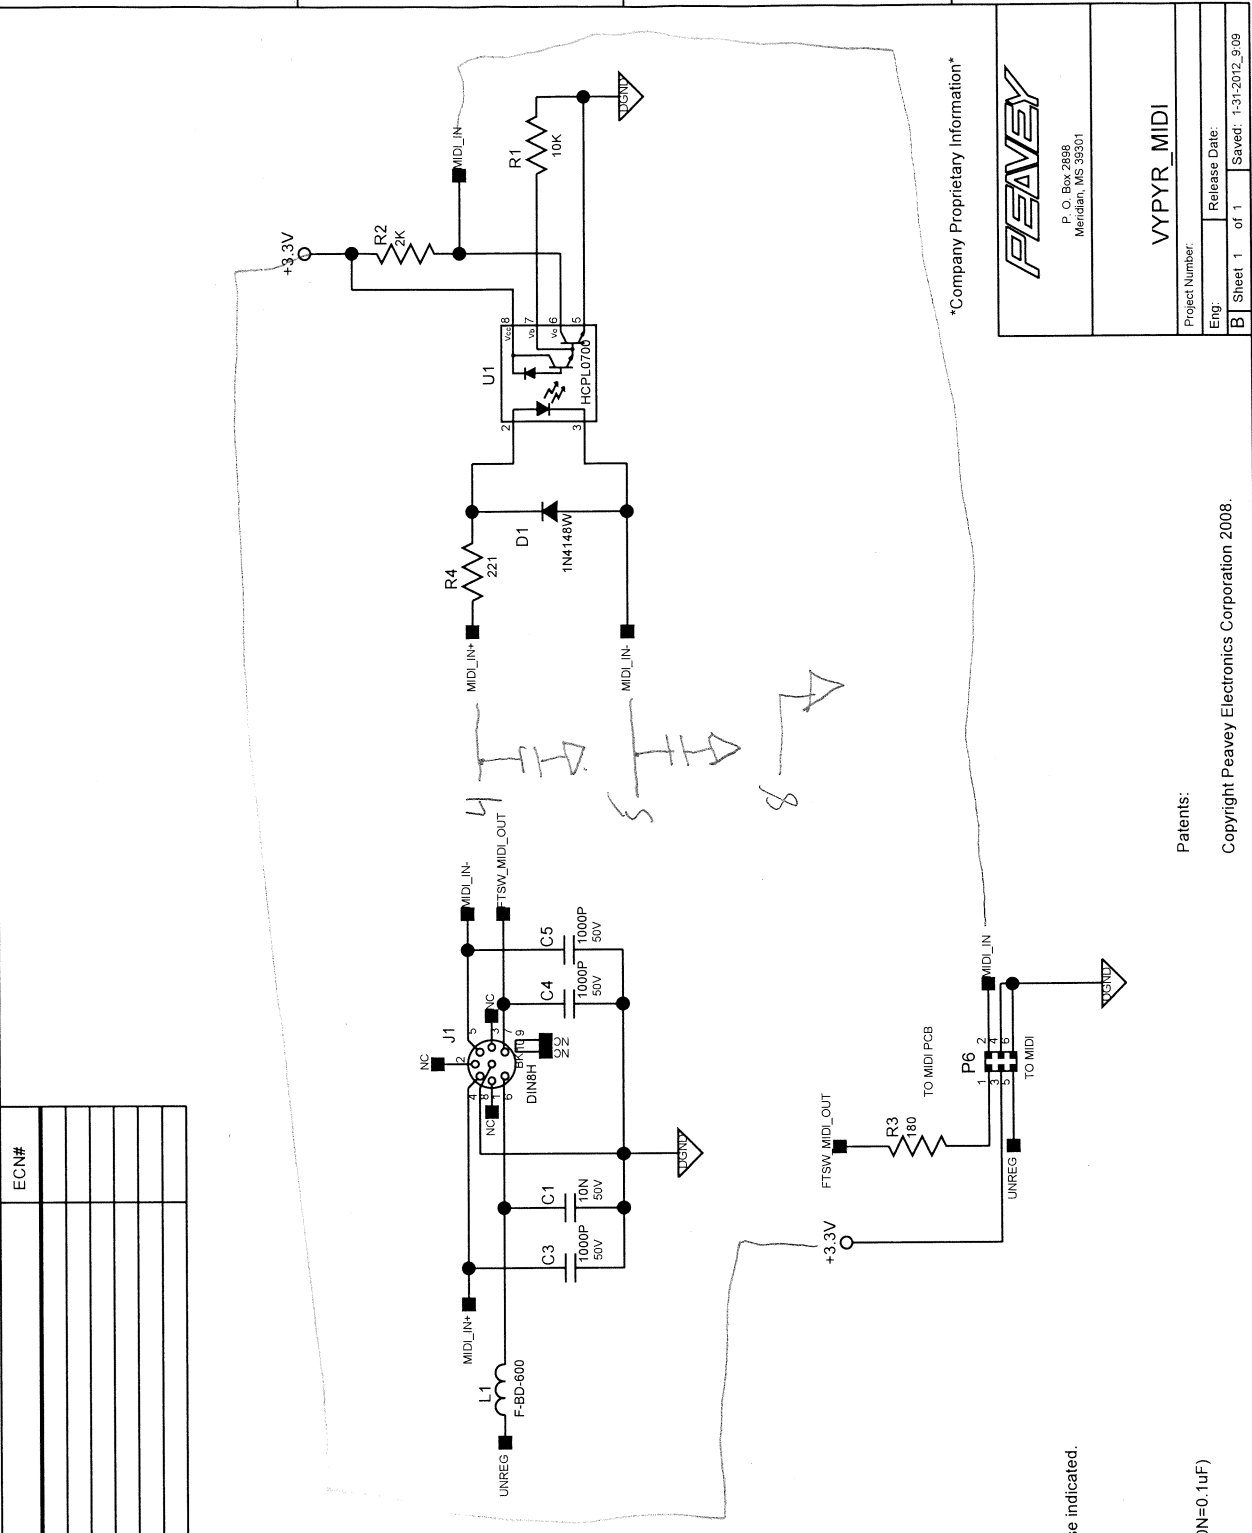

Company Proprietary Information



P. O. Box 2998
Meriden, MS 39301

VYPYR_MIDI

Project Number:
Eng:
Sheet 1 of 1
Release Date:
Saved: 1-31-2012_9:09

Note: All thru hole Resistors are 1/4 Watt unless otherwise indicated.
All SMT 1206 Resistors are 1/4 Watt.
All SMT 0805 Resistors are 1/10 Watt.
Note Capacitor Values are indicated as Follows:
val P = pF (picoFarads) val * 10 exp -12
val N = nF (nanoFarads) val * 10 exp -9 (1N=1000pF, 100N=0.1uF)
val U = uF (microFarads) val * 10 exp -6

Patents:

Copyright Peavey Electronics Corporation 2008.